





ENVIRONMENTAL PRODUCT DECLARATION

Type your text

In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:

STAKKAbox™ Ultima/Ultima Connect

from Cubis Systems

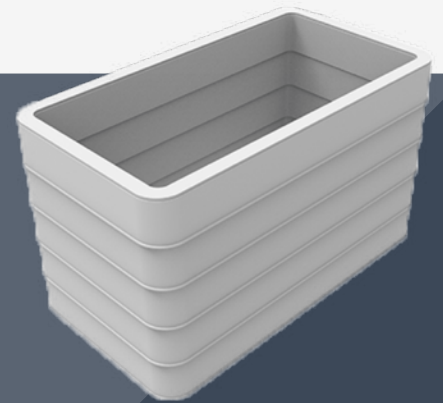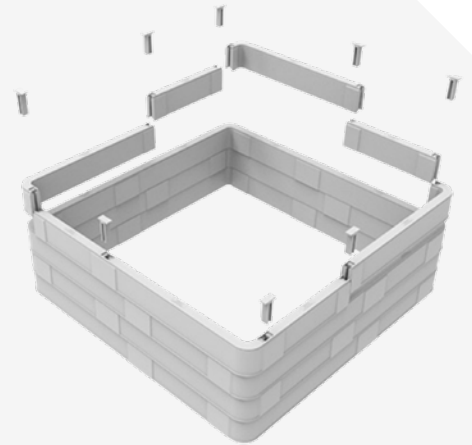

PROGRAMME:

The International EPD® System, www.environdec.com

PROGRAMME OPERATOR:

EPD International AB

EPD REGISTRATION NUMBER:

S-P-04748

PUBLICATION DATE:

2022-02-07

VALID UNTIL:


2026-12-12

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com



CONTENTS

ENVIRONMENTAL PRODUCT DECLARATION	4
Programme Details	4
Cubis Systems	5
Product information	6
LIFE CYCLE ASSESSMENT METHODOLOGY	8
PRODUCT CONTENT	14
ENVIRONMENTAL PERFORMANCE	16
ADDITIONAL INFORMATION	20
Product specification	20
Other additional information	21
References	21

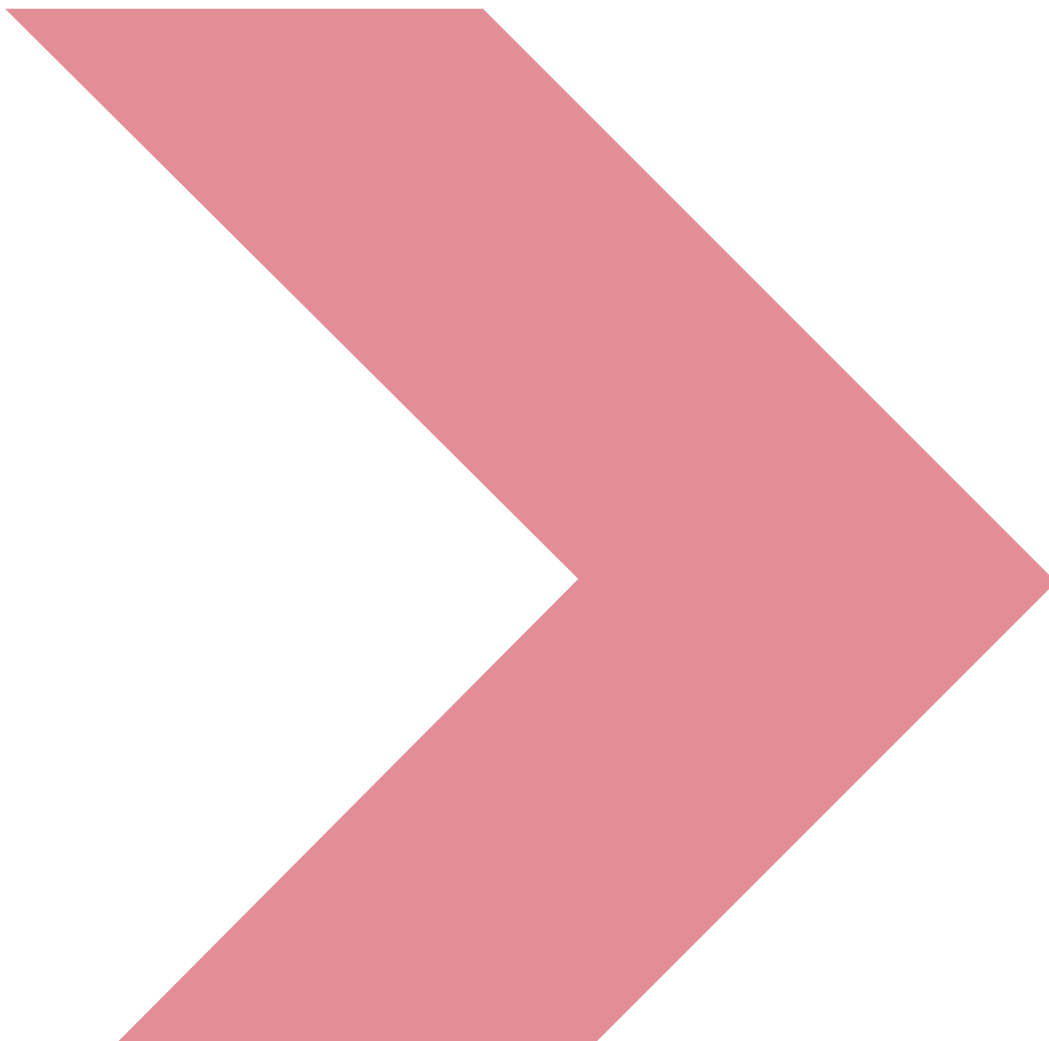



ENVIRONMENTAL PRODUCT DECLARATION

PROGRAMME DETAILS

PROGRAMME:

The International EPD® System

ADDRESS:

EPD International AB
Box 210 60
SE-100 31 Stockholm
Sweden

WEBSITE:

www.environdec.com

EMAIL:

info@environdec.com

CEN standard EN 15804 serves as the Core Product Category Rules (PCR)

Product category rules (PCR): PCR 2019:14
Construction products. Version 1.11, 2021-02-05

PCR review was conducted by: technical committee of the International EPD® System.
www.environdec.com - info@environdec.com

Independent third-party verification of the declaration and data, according to ISO 14025:2006:

EPD process certification EPD verification

Third party verifier: Chris Foster, EuGeos Srl
Approved by: The International EPD® System

Procedure for follow-up of data during EPD validity involves third party verifier:

Yes No

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programmes may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804. For further information about comparability, see EN 15804 and ISO 14025

CUBIS SYSTEMS

OWNER OF THE EPD:

Cubis Systems
4 Silverwood Industrial Estate
Lurgan, Co. Armagh, BT66 6LN, UK
www.cubis-systems.com

CONTACT:

Julia McDaid
Technical Director
JMcDaid@cubis-systems.com

PRODUCT-RELATED OR MANAGEMENT SYSTEM-RELATED CERTIFICATIONS:

Cubis Systems is certified to ISO 14001:2015 Environmental Management and ISO 9001:2015 Quality Management.

NAME AND LOCATION OF PRODUCTION SITE(S):

Cubis Systems
High Carr: Unit 3 High Carr Business Park, Millennium Way,
Newcastle-under-Lyme, Staffordshire, ST5 7XE, UK

Cubis Systems
Liverpool: 3-5 Yardley Road, Knowsley Ind Estate, Kirkby,
Liverpool, L33 7SS, UK

DESCRIPTION OF THE ORGANISATION:

Cubis Systems is the market leader in access chambers and cable protection systems for use within global infrastructure markets. Active across seven distinct market sectors from water to telecoms, and selling to more than 30 countries, Cubis manufactures its products at sites across the UK and Ireland. Being part of CRH enables Cubis to draw down on some of the highest ethical standards and practices, whilst providing knowledge and expertise from one of the largest construction materials companies globally.

Our People

At Cubis, our ability to deliver the best for our customers rests on the commitment, talent and skills of our people. Our employees are dedicated to making the company's innovations in new designs, manufacturing techniques and materials work consistently for customers across the world.

With customer satisfaction strongly embedded in our company culture, we build close relationships in key industries internationally to ensure Cubis products solve real-world issues in the building of underground infrastructure networks.

Our Products

Cubis products deliver high-quality modern solutions that replace conventional construction materials like bricks and concrete. Our strong, lightweight modular products incorporate intelligent design features and can be installed much faster than traditional methods, saving customers time and money.

All our products have been designed to maximise structural strength using the optimum amount of material thus eliminating any unnecessary weight or waste. By re-using materials, where possible, that would otherwise be disposed of as a waste, we not only divert them from waste streams, but also reduce the carbon footprint of our products and promote resource efficiency. The design and adaptability of our products also future proofs the system allowing for expanded capacity without a need for product replacement. Lightweight product parts remove the need for heavy lifting equipment, reducing the energy demand during installation.

Our Responsibilities

Whether in the workplace, the marketplace, the community or the environment, corporate responsibility matters to Cubis and we show it through the way we work and behave.

At Cubis Systems, we use a variety of materials to manufacture our products. Our goal is to create a closed loop recycling system and a circular economy. We can achieve this by using as much recycled material as we can in our manufacturing process and by ensuring our products are either recyclable or reusable wherever possible.

Health and Safety is integrated into the fabric of the company's business and operations. We fully support the right of every employee to work in an environment that means we all go home safely at the end of each day. We also take our responsibility to the environment seriously. We work hard to address the challenges of climate change both through product design and careful management of our production processes.

PRODUCT INFORMATION

PRODUCT NAME:

STAKKAbox™ Ultima / Ultima Connect

PRODUCT IDENTIFICATION:

Access chamber in Glass-Reinforced Polyester (GRP)

UN CPC CODE:

CPC 3712 Glass fibres and articles thereof, except woven fabrics

PRODUCT DESCRIPTION:

Cubis' access chambers are built using the pioneering STAKKAbox™ system. This internationally-specified range of modular, structural and preformed access chambers offers flexible solutions across many different applications and markets.

The STAKKAbox™ Ultima / Ultima Connect offers a flexible access chamber system that provides a modular scalable solution built on-site with easily connectable components, significantly reducing the costs of in-situ construction through time saving along with offering greater health and safety benefits for installers due to its lightweight properties.

VARIABILITY IN SIZE

STAKKAbox™ Ultima/Connect can be used to create virtually any conceivable access chamber clear opening. Both Ultima/Connect offer a large range of chamber dimensions thanks to the large number of standard sections and the variability offered by the Ultima Connect system.

FLEXIBLE DURING INSTALLATION

Chambers can be adapted to suit on-site conditions with standard tools to overbuild over existing networks, introduce duct entries for cable entry and for top-section fine adjustment.

SMOOTH OUTER WALLS WITH LIP TO 'KEY IN'

STAKKAbox™ chambers have smooth outer walls and an outer lip which keys into the backfill

SECTIONAL & TWIN WALL DESIGN

Chambers are built to the required depth by adding 150mm sections. Due to the twin wall design, individual sections are light meaning they can be manually lifted. Each access chamber possesses vertical and horizontal ribs, resulting in a product that is strong vertically and on the sidewall.

For most applications, Ultima doesn't require specialist backfills, reducing installation costs.

FAST AND EASY TO INSTALL

STAKKAbox™ chambers are significantly faster to install than conventional alternatives, with complete installations typically taking up to one hour, reducing installation costs. Only the largest sizes in the range require specialist equipment or plant in order to install the chamber.

HIGH STRENGTH TO WEIGHT RATIO

STAKKAbox™ chambers are significantly lighter than other conventional chambers and can provide the same inherent strength.

CHEMICAL RESISTANCE

GRP outperforms traditional construction methods for chemical resistance during its buried life, resulting in a product that offers longer installed life.

TECHNICAL INFORMATION

Further technical information including, product data sheets, technical drawings, BIM models, product brochures, installation guides, certifications and accreditations is available on the Cubis Systems website: www.cubis-systems.com/uk/technical-area/



LIFE CYCLE ASSESSMENT METHODOLOGY

LCA INFORMATION

DECLARED UNIT:

1 kg of STAKKAbox™ Ultima/Ultima Connect

TIME REPRESENTATIVENESS:

2019

DATABASE USED:

Ecoinvent 3.6

LCA SOFTWARE USED:

Simapro 9.1

LCA PRACTITIONER:

Studio Fieschi & soci Srl
C.so Vittorio Emanuele II, 18 10123 Torino, IT
www.studiofieschi.it

DESCRIPTION OF SYSTEM BOUNDARIES:

Cradle-to-gate with options (Modules A4-A5), modules C1-C4 and module D. System boundaries include:


- A1: Raw material extraction and processing, processing of secondary material input, production of energy used in manufacturing processes (A3);
- A2: Transport of raw materials and secondary material inputs to Cubis Systems sites and internal transport;
- A3: Manufacturing of the construction product and packaging, including water use, emissions to air and water discharges, waste disposal;
- A4: Transport to the installation site;
- A5: Installation;
- C1: De-construction and demolition;
- C2: Transport to waste processing;
- C3: Waste processing for reuse, recovery and/or recycling;
- C4: Final disposal;
- D: Estimate of the potential benefits and/or impacts in case the products under study were reused, recycled or recovered.

The system boundaries do not include:

- Input and output flows related to personnel (e.g. energy used in head offices and sales offices, transports of employees to and from workplace, water use for toilets, etc);
- Input and output flows related to production and maintenance of equipment.



System diagram

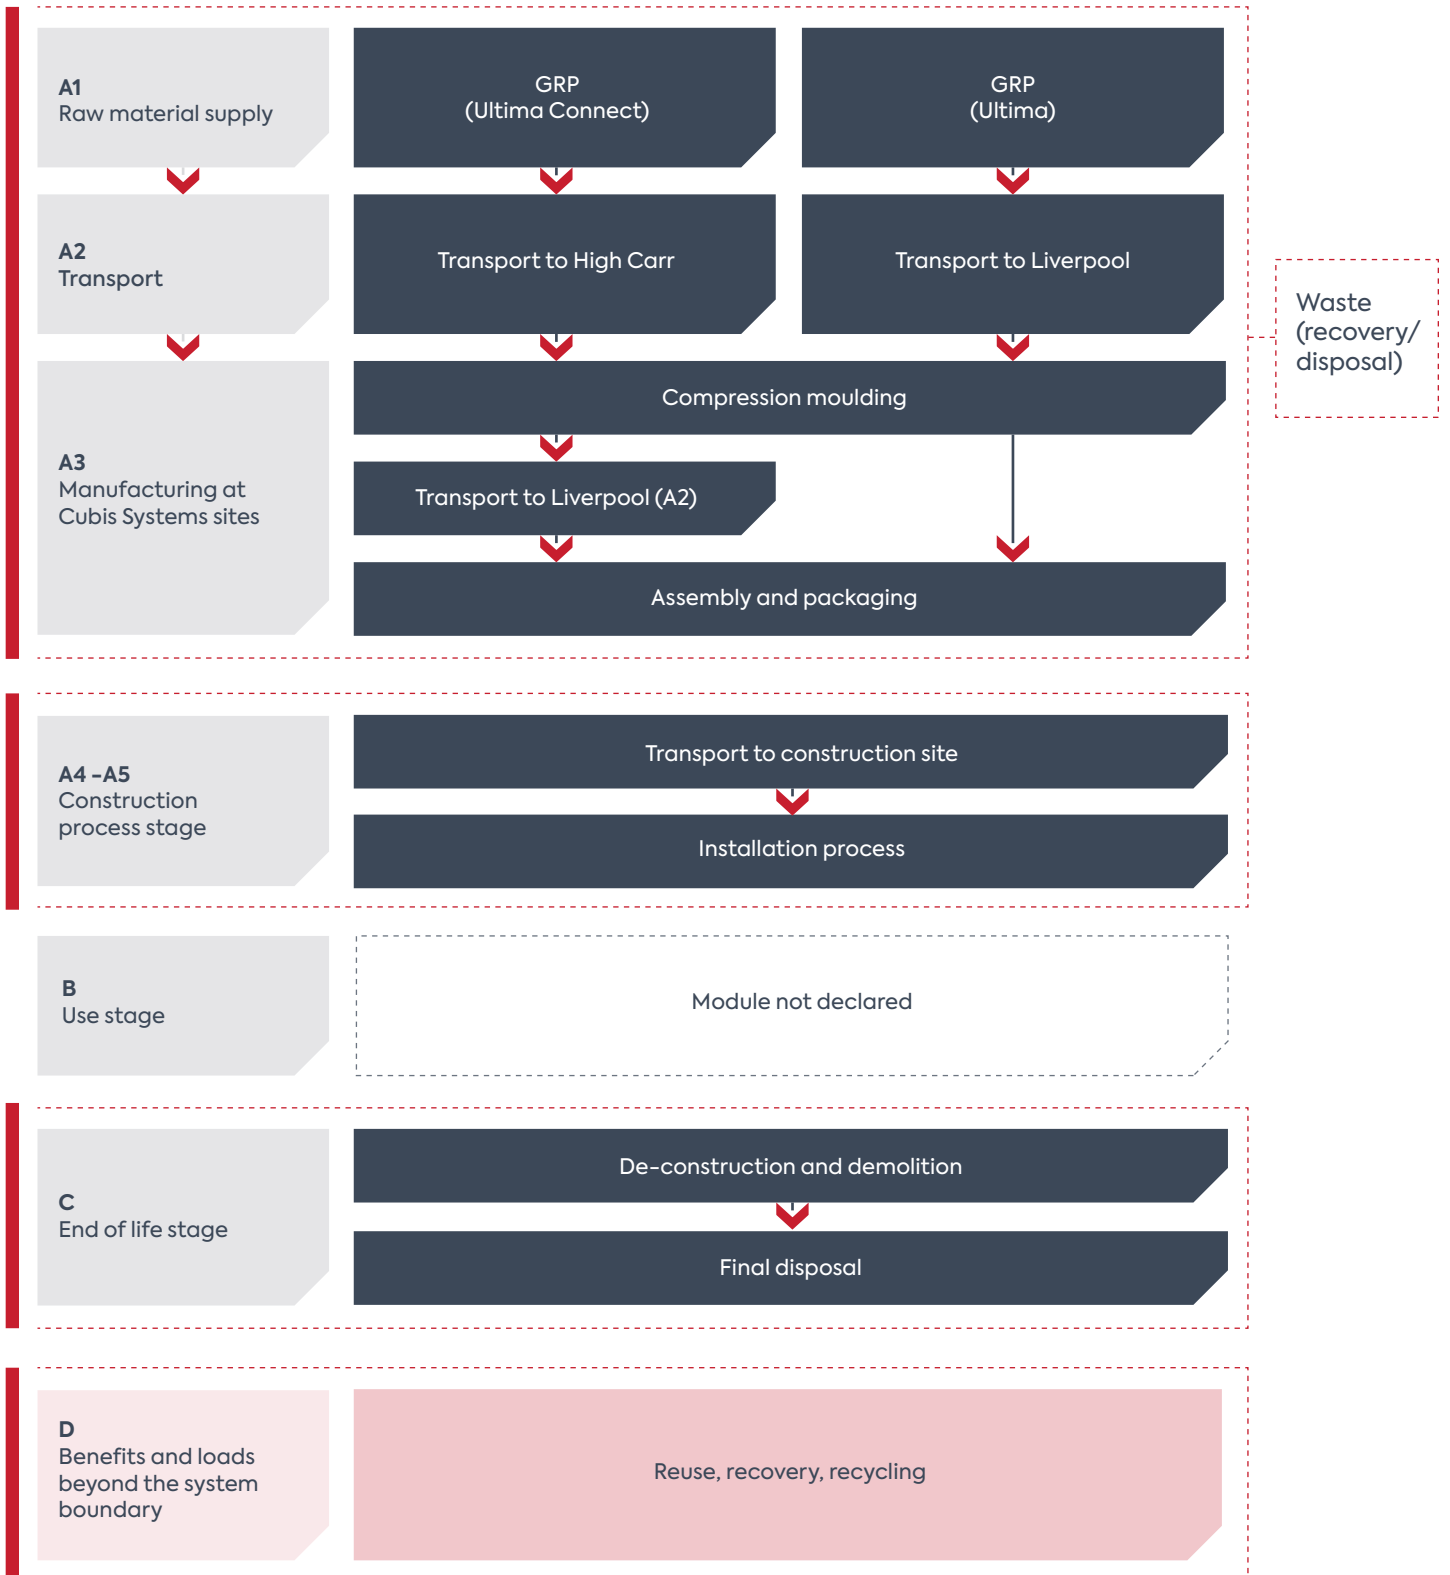

CUT-OFF:

The following cut-offs were applied: PL strapping and steel buckles used for packaging; auxiliary materials used at High Carr (lubricant).

ALLOCATION RULES:

Multifunctional situations were managed as follows:

- electricity consumptions were allocated to the different production processes according to estimates provided by Cubis Systems staff;
- VOC and waste oil in Liverpool manufacturing site were allocated to compression/injection moulded products only;
- other input and output flows than those listed above were allocated based on the mass of products and co-products.

IMPACT ASSESSMENT:

Inventory indicators relating to the use of renewable and non-renewable secondary fuels, as well as energy exported in output flows, have been assumed 0, as these flows are not significant for the products under analysis and their modelling would be subject to a high level of uncertainty.

PRODUCTION PROCESS A1-A3)

STAKKAbox™ Ultima is produced from sheet moulded compound (SMC) GRP into 150mm high solid ring sections that can be stacked on top of one another. Ring sections vary in size from 420x240mm to 1500x750mm. Solid ring sections are manufactured at the Cubis Systems Liverpool site.

STAKKAbox™ Ultima Connect is manufactured from sheet moulded compound (SMC) GRP into 150mm high components. The components can be connected and stacked on top of one another to build solid ring sections to the specified configuration. Components including both straight and corner pieces come in a range of sizes from 400mm to 1900mm (see section PRODUCT SPECIFICATION for all sizes available).

Ultima Connect components are produced at the Cubis Systems High Carr site and sent to the Liverpool site for assembly.

The SMC GRP used for these products is purchased from an external supplier and the Ultima and Ultima Connect products are compression moulded in the Cubis Systems sites (High Carr and Liverpool).

PACKAGING:

It is assumed that pallets are reused 25 times [9].

ENERGY MIX:

Both the Liverpool and High Carr sites use electricity 100% from renewable sources. The GWP-GHG of the electric mix used is 31.4 g CO₂eq./kWh.

TRANSPORT AND INSTALLATION (A4 – A5):

- Module A4: Transportation impacts occurred from delivering the final products to the construction site, covering direct fuel exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions. The distribution scenario was modelled according to logistics data provided by Cubis Systems and using Ecoinvent datasets for freight transport: truck > 32t (diesel) for road transport and ship (diesel) for extra-European transportation:
 - Vehicle type: truck > 32t (diesel) for road transport and ship (diesel) for extra-European transportation;
 - Weighted average distance: 905 km by truck, 1298 km by ship;
 - Capacity utilisation: according to Ecoinvent datasets for freight transport in Europe;
 - Bulk density of transported products: trucks are loaded to their maximum mass capacity;
 - Volume capacity utilisation factor: <1.
- Module A5: The installation of STAKKAbox™ Ultima/ Ultima Connect requires the following inputs:
 - excavator, diesel (0.033 litres/kg),
 - jumping jack, petrol (0.0021 litres/kg),
 - removal of excess soil by truck >32t (0.036 t/kg, distance 10 km one way), assumed 90% to recovery and 10% destined to landfill [10],
 - Waste materials generated by the product's installation: packaging, wooden pallet, to energy recovery (assumed 50 km to recovery facility): 0.0089 kg.







END OF LIFE SCENARIO (C1-C4, D):

- Collection process: 1 kg of waste collected separately.
- Recovery system: not relevant.
- Disposal: 1 kg of GRP hockey sticks/rings for final disposal.
- Assumptions for scenario development:
 - Module C1: the same amount of diesel used for excavators during installation (module A5, 0.033 litres/kg) was assumed;
 - Module C2: a distance of 50 km is assumed for the transport of materials to disposal, distributed as 63% by truck and 37% by train [8];
 - Modules C3 / C4: Although recent industry analyses have recognised the possibility of recovering part of the GRP at the end of its life, as a precautionary measure GRP is assumed to be 100% destined to landfill

The environmental profile presented in this EPD is referred to a generic configuration of Ultima / Ultima Connect, representing the weighted average profile based on the respective production data of the two access chambers

Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

Stages		Module	Modules declared	Geography	Specific data used	Variation – products	Variation – sites
 Product stage	Raw material supply	A1	X	EU	>90%	<10%	<10%
	Transport	A2	X	EU			
	Manufacturing	A3	X	UK			
 Construction process stage	Transport	A4	X	Global			
	Construction installation	A5	X	Global			
 Use stage	Use	B1	ND	-	-	-	-
	Maintenance	B2	ND	-	-	-	-
	Repair	B3	ND	-	-	-	-
	Replacement	B4	ND	-	-	-	-
	Refurbishment	B5	ND	-	-	-	-
	Operational energy use	B6	ND	-	-	-	-
	Operational water use	B7	ND	-	-	-	-
 End of life stage	De-construction demolition	C1	X	Global	-	-	-
	Transport	C2	X	Global	-	-	-
	Waste processing	C3	X	Global	-	-	-
	Disposal	C4	X	Global	-	-	-
Resource recovery stage	Reuse-Recovery-Recycling-potential	D	X	Global	-	-	-



PRODUCT CONTENT

Product components	Weight, kg	Post-consumer material, weight-%	Renewable material, weight-%
Rings / Hockey sticks - Glass Reinforced Polyester (GRP), sheet moulded compound	1.0	0	0
TOTAL	1.0	0	0
Packaging materials	Weight, kg	Weight-% (versus the product)	
Pallet (wood)	0.0089	0.89%	
TOTAL	0.0089	0.89%	

The product does not contain dangerous substances from the candidate list of Substances of Very High Concern (SVHC) for Authorisation.



ENVIRONMENTAL PERFORMANCE

Potential environmental impact – mandatory indicators according to EN 15804

Results per 1 kg of STAKKAbOX Ultima/Ultima Connect									
INDICATOR	UNIT	Tot.A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-total	kg CO ₂ eq.	2.21E+00	1.17E-01	1.85E-01	1.08E-01	3.66E-03	0.00E+00	1.14E-01	0.00E+00
GWP-fossil	kg CO ₂ eq.	2.20E+00	4.71E-05	1.86E-04	2.02E-05	4.54E-06	0.00E+00	1.02E-05	0.00E+00
GWP-biogenic**	kg CO ₂ eq.	4.31E-03	4.37E-05	3.55E-05	8.49E-06	2.28E-06	0.00E+00	2.23E-06	0.00E+00
GWP-luluc	kg CO ₂ eq.	7.04E-04	2.70E-08	4.42E-08	2.33E-08	7.52E-10	0.00E+00	3.12E-09	0.00E+00
ODP	kg CFC 11 eq.	2.47E-07	9.17E-04	1.66E-03	1.13E-03	1.68E-05	0.00E+00	7.74E-05	0.00E+00
AP	mol H ⁺ eq.	8.23E-03	8.56E-07	1.30E-06	3.92E-07	7.71E-08	0.00E+00	1.02E-07	0.00E+00
EP-freshwater	kg P eq.	5.54E-05	2.62E-06	3.99E-06	1.20E-06	2.36E-07	0.00E+00	3.14E-07	0.00E+00
EP-freshwater	kg PO ₄ ³⁻ eq.	1.70E-04	2.53E-04	6.80E-04	4.97E-04	4.63E-06	0.00E+00	1.47E-04	0.00E+00
EP-marine	kg N eq.	1.42E-03	2.80E-03	7.47E-03	5.46E-03	5.16E-05	0.00E+00	3.08E-04	0.00E+00
EP-terrestrial	mol N eq.	1.49E-02	8.14E-04	2.09E-03	1.50E-03	1.61E-05	0.00E+00	1.12E-04	0.00E+00
POCP	kg NMVOC eq.	5.68E-03	1.84E-06	1.14E-06	1.65E-07	5.69E-08	0.00E+00	7.56E-08	0.00E+00
ADP-minerals & metals*	kg Sb eq.	5.07E-06	1.78E+00	2.98E+00	1.48E+00	5.76E-02	0.00E+00	2.30E-01	0.00E+00
ADP-fossil*	MJ	4.03E+01	5.47E-03	4.23E-02	1.99E-03	2.99E-04	0.00E+00	1.06E-03	0.00E+00
WDP	m ³	6.74E+00	5.47E-03	4.23E-02	1.18E-04	2.99E-04	0.00E+00	1.06E-03	0.00E+00
Acronyms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption								

* Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator. ** Disclaimer: As there is no significant contribution of biogenic carbon in the product, the balance of CO₂ from biogenic origin entering and leaving the system was assumed to be neutral.

Potential environmental impact – additional mandatory and voluntary indicators

Results per 1 kg of STAKKAbOX Ultima/Ultima Connect									
INDICATOR	UNIT	Tot.A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-GHG ¹	kg CO ₂ eq.	2.12E+00	1.16E-01	1.83E-01	1.07E-01	3.63E-03	0.00E+00	9.76E-02	0.00E+00

Use of resources

Results per 1 kg of STAKKAbOX Ultima/Ultima Connect									
INDICATOR	UNIT	Tot.A1-A3	A4	A5	C1	C2	C3	C4	D
PERE	MJ	2.44E+00	2.18E-02	2.97E-02	8.02E-03	2.26E-03	0.00E+00	1.06E-02	0.00E+00
PERM	MJ	1.52E-01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PERT	MJ	2.59E+00	2.18E-02	2.97E-02	8.02E-03	2.26E-03	0.00E+00	1.06E-02	0.00E+00
PENRE	MJ	2.48E+01	1.78E+00	2.98E+00	1.48E+00	5.76E-02	0.00E+00	2.30E-01	0.00E+00
PENRM	MJ	1.55E+01	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
PENRT	MJ	4.03E+01	1.78E+00	2.98E+00	1.48E+00	5.76E-02	0.00E+00	2.30E-01	0.00E+00
SM	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
RSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
NRSF	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
FW	m ³	1.58E-01	1.93E-04	1.08E-03	7.63E-05	1.41E-05	0.00E+00	2.86E-04	0.00E+00
Acronyms	PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water								

¹ The indicator includes all greenhouse gases included in GWP-total but excludes biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. This indicator is thus almost equal to the GWP indicator originally defined in EN 15804:2012+A1:2013.

Waste production and output flows

Waste production

Results per 1 kg of STAKKAbox Ultima/Ultima Connect									
INDICATOR	UNIT	Tot.A1-A3	A4	A5	C1	C2	C3	C4	D
Hazardous waste disposed	kg	3.00E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Non-hazardous waste disposed	kg	2.39E-02	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.00E+00	0.00E+00
Radioactive waste disposed	kg	6.41E-05	1.22E-05	1.98E-05	1.03E-05	3.83E-07	0.00E+00	1.52E-06	0.00E+00

Output flows

Results per 1 kg of STAKKAbox Ultima/Ultima Connect									
INDICATOR	UNIT	Tot.A1-A3	A4	A5	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Material for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Materials for energy recovery	kg	6.84E-02	0.00E+00	8.90E-03	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00
Exported energy, thermal	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00

Information on biogenic carbon content

Results per functional or declared unit		
BIOGENIC CARBON CONTENT	UNIT	QUANTITY
Biogenic carbon content in product	kg C	0
Biogenic carbon content in packaging	kg C	0.0045

Note: 1 kg biogenic carbon is equivalent to 44/12 kg CO₂.



ADDITIONAL INFORMATION


PRODUCT SPECIFICATION

STAKKABOX™ Ultima - SOLID RING SECTIONS




Chamber clear opening size*			
LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)
420	240	150	6.6
500	500	150	9
530	380	150	9
800	800	150	13
885	520	150	12
915	445	150	11
1160	380	150	14
1200	600	150	19
1200	1200	150	20
1300	850	150	20
1310	610	150	14
1380	530	150	16
1500	750	150	16

STAKKABOX™ Ultima Connect - RING SECTIONS**



Chamber clear opening size*			
LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	WEIGHT (kg)
600	600	150	16.0
675	675	150	17.6
750	600	150	17.6
750	675	150	18.4
750	750	150	19.2
900	600	150	19.6
900	675	150	21.2
900	900	150	23.2
1000	600	150	20.4
1000	1000	150	24.8
1200	675	150	23.0
1200	900	150	25.8
1500	750	150	26.4
1500	900	150	28
1500	1000	150	28.8
1500	1500	150	32.8
1800	675	150	30.4
1800	900	150	33.2
1800	1800	150	43.2
1900	1200	150	34.6
2000	600	150	31.0
2000	900	150	34.6
2000	1000	150	35.4
2000	1500	150	39.4
2000	2000	150	46.0
2200	1200	150	39.6
2500	1200	150	42.0
2500	1500	150	44.2
2500	2500	150	55.6
2900	1200	150	45.8
2900	1500	150	48.0
3000	1500	150	61.8
3000	2000	150	68.4
3000	3000	150	90.8
3500	1500	150	94.0

STAKKABOX™ Ultima Connect - COMPONENTS



LENGTH (mm)	HEIGHT (mm)	WEIGHT (kg)	COMPONENT PART
500	150	3.11	Sidewall
600	150	3.5	Sidewall
800	150	4.7	Sidewall
1000	150	5.4	Sidewall
400	150	3.1	Corner
600	150	3.8	Corner
675	150	4.2	Corner
750	150	4.6	Corner
800	150	4.8	Corner
900	150	5.6	Corner
1000	150	6	Corner
1200	150	6.9	Corner
1500	150	8	Corner
1900	150	10	Corner
		0.2	Peg



* Network access chamber sections are measured by the inside measurement of the chamber ring section and this is referred to as the clear opening.

** The right table provides clear opening dimensions and weights for common sizes of Ultima Connect chambers. For sizes not listed above (including larger sizes) these details can be obtained from CUBIS. The weight of the chamber can be used to calculate the environmental indicators on pages 16 - 18.

OTHER ADDITIONAL INFORMATION

Cubis is a member of Composites UK. Within this association, CUBIS participate in the Composites UK Sustainability & Construction Sub-Group with involvement in research projects to expand the recycling knowledge and capabilities of composites.

For further information on Cubis' Sustainability Report please see our website: www.cubis-systems.com

REFERENCES

- 1 General Programme Instructions of the International EPD® System. Version 3.01
- 2 PCR 2019:14. Construction products. Version 1.11
- 3 EN 15804:2012 + A2:2019 Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction products
- 4 ISO 14025:2010 Environmental labels and declarations – Type III environmental declarations – Principles and procedures
- 5 ISO 14040:2006 Environmental management – Life cycle assessment – Principles and framework
- 6 ISO 14044:2006 Environmental management – Life cycle assessment – Requirements and guidelines
- 7 Studio Fieschi & soci Srl, Life Cycle Assessment (LCA) of Cubis Systems' products: STAKKAbox ULTIMA/ULTIMA Connect, STAKKAbox Fortress, STAKKAbox Modula, RapidSTACK, MONObox Carson, AX-S Covers, CABLEprotect PROtrough and MMtrough, CABLEprotect RAILduct, CABLEprotect MULTIduct.
- 8 Ecoinvent 3.6
- 9 European Commission, 2018, Product Environmental Footprint Category Rules Guidance, Version 6.3
- 10 Eurostat, 2018, Recovery rate of construction and demolition waste.
- 11 Gervasio, H., Dimova, S., 2018, Model for Life Cycle Assessment (LCA) of buildings, EC JRC technical reports



ENVIRONMENTAL PRODUCT DECLARATION

STAKKAbox™ ULTIMA/ULTIMA Connect

CONTACT US

Head Office: 4 Silverwood
Industrial Estate, Lurgan,
Co. Armagh, BT66 6LN,
Northern Ireland

Telephone: +44 (0)28 38 313 100
Email: info@cubis-systems.com

www.cubis-systems.com

DRIVEN BY INNOVATION

Cubis Systems is Europe's leading manufacturer of network access chamber and ducting systems, used in the construction of infrastructure networks for rail, telecoms, water, construction and energy markets.

Cubis has developed an innovative approach in a traditional industry. This has been achieved by developing quality products which replace traditional construction materials, like bricks and concrete, with lightweight plastics incorporating intelligent design features. These can then be installed faster and ultimately save our customers both time and money.

Cubis manufactures preformed network access chamber systems STAKKAbox™, AX-S™ access covers, MULTIduct™ multiple duct system and PROtrough cable trough at its manufacturing sites throughout the UK and Ireland these products are exported to more than 30 countries throughout the world.

At Cubis we pride ourselves on delivering technical customer support, new innovation, product quality and the highest levels of customer satisfaction.